



# TERRACE ROOF

Exclusif conservatory roof system without thermal break with inner or outer statica.

**aliplast**<sup>®</sup>  
aluminium systems

# Terrace Roof

MEETS THE  
**EN1090-3**  
STANDARD

## DIFFERENT DESIGN

- ✓ Roof overhang with outer beams
- ✓ Roof with corner rafters with variable outer beams
- ✓ Saddle roof for carports with outer beams
- ✓ Roof with valley with outer beams

## STATICA

- ✓ Span gutter between 2 supporting posts up to 600 cm possible\*
- ✓ Depth roof beam up to 600 cm \*
- ✓ Certified connection between rain gutter and support


(\*) taking into account safety glass of 10 mm, a beam distance of 80 cm, snow load of 85 kg / m<sup>2</sup> and deflection factor L / 200.

## FUNCTIONS AND POSSIBILITIES


- ✓ Both internal and external statics in 1 system
- ✓ Variable roofpitch between 5° and 25°
- ✓ Possibility to use both glazing beads and rubbers with external statics
- ✓ Possibility to use both screw lists and click lists te gebruiken with external statics
- ✓ Easy mounting of lighting thanks to the clamping strips with external statics
- ✓ Ring beams with variable gutter
- ✓ Profiles with different shorter lengths

## IMPORTANT!


Installation of a sun visor on the side beams is possible

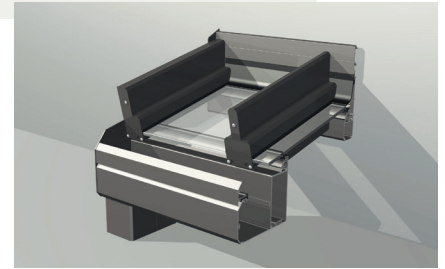


TD OUTER STATICA

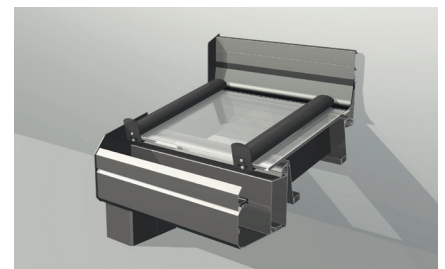


TD INNER STATICA

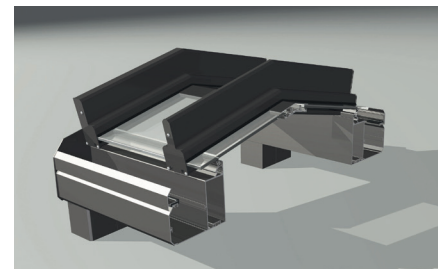

TD WITH SADDLE ROOF

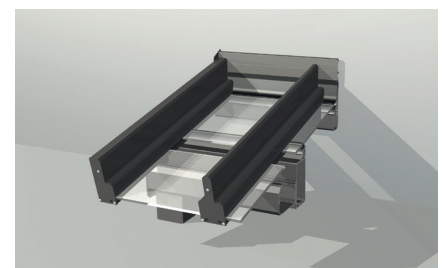

TD WITH ROOF CROSSING

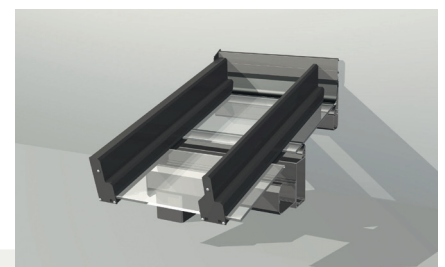

TD WITH RING BEAMS

ALIPLAST PLC

WAASLANDLAAN 15 | B - 9160 LOKEREN  
TEL +32 9 340 55 55 | INFO@ALIPLAST.COM | WWW.ALIPLAST.COM